



PCT/GB03/2954

10/520987



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road

Newport
South Wales
NP10 8QQ

23 SEP 2003

WIFO

PCT


PCT/GB03/2954

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

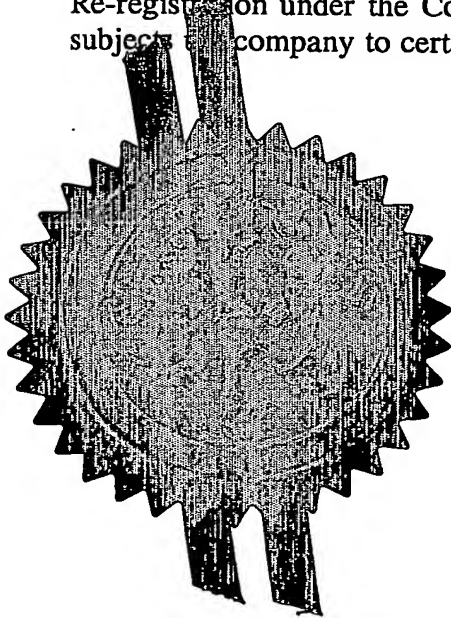

Signed

Stephen Hordley

Dated

12 September 2003


**PRIORITY
DOCUMENT**

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

BEST AVAILABLE COPY

An Executive Agency of the Department of Trade and Industry

Patents Act 1977
(Rule 16)

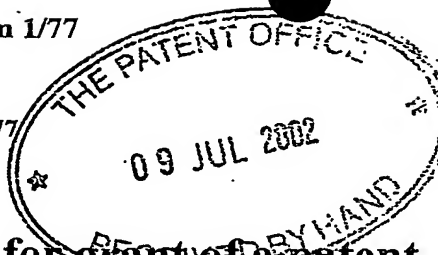

The
**Patent
Office**

10JUL02 E732013-6 000032
P01/7790 0.00-0215854.1

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road
Newport
Gwent NP9 1RH

1. Your reference REG/P19214GB

2. Patent application number 09 JUL 2002 0215854.1
(The Patent Office will fill in this part)

3. Full name, address and postcode of the or of each applicant (underline all surnames)

Sericol Limited
Patricia Way
Pysons Road Industrial Estate
Broadstairs
Kent
CT10 2LE

07340730001

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation United Kingdom

4. Title of the invention A Printing Ink

5. Name of your agent (if you have one) ELKINGTON AND FIFE

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

ELKINGTON AND FIFE
PROSPECT HOUSE
8 PEMBROKE ROAD
SEVENOAKS
KENT
TN13 1XR

Patents ADP number (if you know it) 67004

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or each of these earlier applications and (if you know it) the or each application number	Country	Priority application number (if you know it)	Date of Filing (day/month/year)
---	---------	---	------------------------------------

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application	Number of earlier application	Date of Filing (day/month/year)
---	-------------------------------	------------------------------------

Patents Form 1/77

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer "Yes" if:

Yes

- a) any applicant named in part 3 is not an inventor, or
- b) there is an inventor who is not named as an applicant, or
- c) any named applicant is a corporate body.

See note (d)

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

-

Description

8

Claim(s)

2

Abstract

-

Drawing(s)

-

10. If you are also filing any of the following, state how many against each item.

Priority documents

-

Translations of priority documents

-

Statement of inventorship and right to grant of a patent (Patents Form 1/77)

-

Request for preliminary examination and search (Patents Form 9/77)

1

Request for substantive examination (Patents Form 10/77)

-

Any other documents (please specify)

-

11.

I/We request the grant of a patent on the basis of this application.

Richard Gillard

Signature
Richard Gillard

Date
08 July 2002

12. Name and daytime telephone number of person to contact in the United Kingdom

Richard Gillard
020 7405 3505

A Printing Ink

This invention concerns inks for use in ink-jet printers. In particular, this invention concerns inks for use in ink-jet printers that are cured using ultraviolet radiation.

5

In ink-jet printing, minute droplets of black or coloured ink are ejected in a controlled manner from one or more reservoirs or printing heads through narrow nozzles on to a substrate, which is moving relative to the reservoirs. The ejected ink forms an image on the substrate. For high-speed printing, the inks must flow rapidly from the printing
10 heads, and, to ensure that this happens, they must have in use a low viscosity, typically below 50 mPas at 25°C although in most applications the viscosity should be below 25 mPas. Typically, when ejected through the nozzles, the ink has a viscosity of 10.5 mPas at the jetting temperature, which is usually elevated to about 40°C (the ink might have a much higher viscosity at ambient temperature). Some print heads
15 require especially low viscosity, such as 4 or 5 mPas at the jetting temperature, to achieve reliable jetting performance. Furthermore, different materials are used in the manufacture of print heads, some of which may be sensitive to higher temperatures, thereby limiting the jetting temperature to close to ambient temperature. This puts additional pressure on the viscosity requirements of the product. For reasons such as
20 ease of engineering and cost concerns, printer integrators would also rather avoid having to heat the print head to achieve reliable jetting. Thus, low viscosity ink-jet inks are highly desirable.

The inks must also be resistant to drying or crusting in the reservoirs or nozzles. For
25 these reasons, ink-jet inks for application at or near ambient temperatures are commonly formulated to contain a large proportion of a mobile liquid vehicle or solvent. In one common type of ink-jet ink this liquid is water - see for example the paper by Henry R. Kang in the Journal of Imaging Science, 35(3), pp. 179-188 (1991). In those systems, great effort must be made to ensure the inks do not dry in
30 the head due to water evaporation. In another common type the liquid is a low-boiling solvent or mixture of solvents - see, for example, EP 0 314 403, EP 0 424 714 and GB9927247.8. Unfortunately, ink-jet inks that include a large proportion of water or solvent cannot be handled after printing until the inks have dried, either by

evaporation of the solvent or its absorption into the substrate. This drying process is often slow and in many cases (for example, when printing on to a heat-sensitive substrate such as paper) cannot be accelerated.

- 5 Another type of ink-jet ink contains unsaturated organic compounds, termed monomers, which polymerise by irradiation, commonly with ultraviolet light, in the presence of a photoinitiator. This type of ink has the advantage that it is not necessary to evaporate the liquid phase to dry the print; instead the print is exposed to radiation to cure or harden it, a process that is more rapid than evaporation of solvent at moderate temperatures. These monomers may be acrylate or methacrylate esters, as is disclosed in EP 0540203B, US-A-5,270,368 and in WO 97 31071. In such ink-jet inks it is necessary to use monomers possessing a low viscosity. In practice it is difficult to find (meth)acrylate monomers or combinations of (meth)acrylate monomers which do not give compositions with an unacceptably high viscosity for ink-jet printing. This is especially true if materials are selected with more than one polymerisable functional group in the molecule, though these monomers have the advantage of giving a more cross-linked, and therefore tougher, polymer after irradiation. Thus, there is a restriction on the selection of the higher molecular weight multifunctional (meth)acrylates which are generally more viscous but which, other things being equal, give after polymerisation more resistant films. In practice monofunctional acrylate monomers need to be used with multifunctional acrylate monomers to arrive at a suitably low viscosity for ink-jet printing. However, this tends to reduce the cure speed and decreases the cross-link density, which affects properties such as adhesion and toughness, when printed onto non-porous substrates.
- 25 Another method for producing UV ink-jet inks with low viscosity and good end-user properties is described in PCT/GB02/00368. This method, which describes the use of α,β -unsaturated ether monomers, especially vinyl ethers, with multifunctional (meth)acrylates, eliminates the requirement for monofunctional acrylates in the ink due to the very good diluency properties of α,β -unsaturated ether monomers. Low viscosity products with very good chemical resistance, fast curing speed and good adhesion to a wide range of materials are thus achieved.
- 30

Nevertheless, in the case of some applications, such as paper and board printing for example for the packaging industry, the adhesion requirements are less demanding than when printing onto non-porous substrates. There are fewer requirements for properties such as cure speed and adhesion due to absorption of part of the ink into the porous material. It is therefore possible to produce inks containing monofunctional (meth)acrylates with a very low viscosity but which still meet the application requirements for porous substrates.

Accordingly, the present invention provides an ink-jet ink which is substantially free of water, volatile organic solvents and multifunctional (meth)acrylates, comprising at least one monofunctional (meth)acrylate monomer, at least one α,β -unsaturated ether monomer, at least one radical photoinitiator and at least one colouring agent, the ink having a viscosity of less than 50 mPas at 25°C.

The present invention thus provides extra-low viscosity inks, which still meet the requirements for printing onto porous substrates such as paper and board. This is achieved by using a mixture of α,β -unsaturated ether monomer – which allows a sufficiently high degree of cross-linking to achieve a sufficient cure speed – and monofunctional (meth)acrylates, which gives a very low viscosity product.

20

Preferably the ink is suitable for printing onto porous substrates.

Preferably the ink includes, by weight, from 2 to 15 (particularly preferably 5 to 15) parts of monofunctional (meth)acrylate monomer to 1 part of α,β -unsaturated ether monomer.

25

Preferably, the monofunctional (meth)acrylate monomers are preferably the esters of acrylic acid, for example octyl acrylate, decyl acrylate, isobornyl acrylate, phenoxyethyl acrylate, tetrahydrofuryl acrylate, 2-(2-ethoxyethoxy) ethylacrylate, and mixtures thereof.

30

Esters of methacrylic acid (i.e. methacrylates) can be, for example, allyl methacrylate, tetrahydrofury methacrylate, 2-phenoxyethyl methacrylate and isobornyl methacrylate.

- 5 Preferably the monofunctional (meth)acrylate monomer is present in an amount from 50 to 95% by weight, preferably from 60 to 80% by weight.

10 The phrase "substantially free of multifunction (meth)acrylates used herein means that multifunctional (meth)acrylates are to be avoided in order to maintain a low viscosity, although, small amounts of multifunctional (meth)acrylates are tolerated. The amounts of multifunctional (meth)acrylates are kept to a minimum such that the majority of cross-links are formed by the α,β -unsaturated ether monomers rather than the multifunctional (meth)acrylate monomers. Preferably, multifunctional (meth)acrylate monomers are present at less than 10%, particularly preferably less than 5%.

One or more α,β -unsaturated ether monomers must be present in the composition of the present invention. Examples of α,β -unsaturated ether monomers are vinyl ether monomers, such as triethylene glycol divinyl ether, diethylene glycol divinyl ether, 20 1,4-cyclohexanedimethanol divinyl ether and ethylene glycol monovinyl ether, as well as ethyl-1 propenyl ether, triethyleneglycol methyl propenyl ether, triethyleneglycol methyl vinyl ether and 2-cyclopenten-1-yl ether. Mixtures of α,β -unsaturated ether monomers may be used. The proportion of multifunctional α,β -unsaturated ether monomer is preferably between 1 and 30% by weight, more preferably between 7 and 25 15%, provided that the ratio of acrylate monomer to α,β -unsaturated ether monomer lies between 5:1 and 15:1. Preferably multifunctional, more preferably difunctional and trifunctional α,β -unsaturated ether monomers are used.

30 Preferably the α,β -unsaturated ether monomer is present from 1 to 30% by weight, particularly preferably from 7 to 15%, provided that the ratio of (meth)acrylate monomer to α,β -unsaturated ether monomer is between 2:1 and 15:1.

Preferably the α,β -unsaturated ether monomer is a vinyl ether monomer. Particularly preferably the vinyl ether is selected from triethylene glycol divinyl ether, diethylene glycol divinyl ether, 1,4-cyclohexanedimethanol divinyl ether, ethylene glycol monovinyl ether and mixtures thereof.

5

In addition to the monomers described above, the compositions include a photoinitiator, which, under irradiation by ultraviolet light, initiates the polymerization of the monomers. Preferred are photoinitiators which produce free radicals on irradiation (free radical photoinitiators) such as, for example, benzophenone, 1-hydroxycyclohexyl phenyl ketone, 2-benzyl-2-dimethylamino-(4-morpholinophenyl)butan-1-one, benzil dimethylketal, bis(2,6-dimethylbenzoyl)-2,4,4-trimethylpentylphosphine oxide or mixtures thereof. Such photoinitiators are known and commercially available such as, for example, under the trade names Irgacure, Darocur (from Ciba) and Lucerin (from BASF).

15

Preferably the photoinitiator is present from 1 to 20% by weight, preferably from 4 to 10% by weight, of the ink.

The ink-jet ink of the present invention also includes a colouring agent, which may be either dissolved or dispersed in the liquid medium of the ink. Preferably the colouring agent is a dispersible pigment, of the types known in the art and commercially available such as, for example, under the trade-names Palitol (available from BASF plc), Cinquasia, Irgalite (both available from Ciba Speciality Chemicals) and Hostaperm (available from Clariant UK). The pigment may be of any desired colour such as, for example, Pigment Yellow 13, Pigment Yellow 83, Pigment Red 9, Pigment Red 184, Pigment Blue 15:3, Pigment Green 7, Pigment Violet 19, Pigment Black 7. Especially useful are black and the colours required for trichromatic process printing. Mixtures of pigments may be used. The total proportion of pigment present is preferably from 0.5 to 15% by weight, more preferably from 1 to 5% by weight.

Other components of types known in the art may be present in the ink to improve the properties or performance. These components may be, for example, surfactants, defoamers, dispersants, synergists for the photoinitiator, stabilisers against

deterioration by heat or light, reodorants, flow or slip aids, biocides and identifying tracers.

The present invention also provides a method of ink-jet printing using the above-described ink.

Preferably the printing is carried out on porous substrates.

The ink of the present invention is preferably cured by ultraviolet irradiation and is suitable for application by ink-jet printing.

We have found that this ink-jet ink exhibits a desirable very low viscosity (less than 50 mPas, more preferably less than 20 mPas and most preferably less than 10 mPas at 25°C).

(Meth)acrylate is intended herein to have its standard meaning, i.e. acrylate and/or methacrylate.

The inks of the invention may be prepared by known methods such as, for example, stirring with a high-speed water-cooled stirrer, or milling on a horizontal bead-mill.

Examples

The invention will now be described, by way of example, with reference to the following examples (parts given are by weight). Examples 1 to 3 are cyan UV ink-jet inks. These inks use combinations of monofunctional acrylate monomers and of α,β -unsaturated ethers.

Example 1

	Sartomer 339 (UV diluent from Cray Valley)	69.4 parts
	Solsperse 32000 (dispersant from Avecia)	0.40 parts
	Irgalite Blue (pigment from Ciba)	3.60 parts
5	Genorad 16 (stabiliser from Rahn AG)	0.05 parts
	Rapi-cure DVE-3 (difunctional vinyl ether from ISP Europe)	10.0 parts
	Lucirin TPO (photoinitiator from BASF)	8.5 parts
	Benzophenone (photoinitiator)	4.0 parts
	Irgacure 184 (photoinitiator from Ciba)	4.0 parts
10	Byk 307 (defoamer from BYK Chemie)	0.05 parts

Sartomer 339 is phenoxy ethyl acrylate, i.e. a monofunctional acrylate. The product was an ink having a viscosity of 12.7 mPas at 25°C. The ink was printed on to paper and irradiated by passing 30 m/min under light from an iron-doped ultra-violet lamp of power 120 W/cm. The ink gave a print with good cure, adhesion and chemical resistance.

Example 2

	Sartomer 256 (UV diluent from Cray Valley)	69.4 parts
20	Solsperse 32000 (dispersant from Avecia)	0.40 parts
	Irgalite Blue (pigment from Ciba)	3.60 parts
	Genorad 16	0.05 parts
	Rapi-cure DVE-3 (difunctional vinyl ether from ISP Europe)	10.0 parts
	Lucirin TPO (photoinitiator from BASF)	8.5 parts
25	Benzophenone (photoinitiator)	4.0 parts
	Irgacure 184 (photoinitiator from Ciba)	4.0 parts
	Byk 307 (defoamer from BYK Chemie)	0.05 parts

Sartomer 256 is 2-(2-ethoxyethoxy)ethyl acrylate, i.e. a monofunctional acrylate. The product was an ink having a viscosity of 5.4 mPas at 25°C. The ink was printed onto cardboard and exposed by passing at 30 m/min under light from an iron-doped ultraviolet lamp of power 120 W/cm. As in Example 1 the ink gave a print with good cure, adhesion and chemical resistance.

Example 3

	Sartomer 285 (UV diluent from Cray Valley)	69.4 parts
	Solsperse 32000 (dispersant from Avecia)	0.40 parts
5	Irgalite Blue (pigment from Ciba)	3.60 parts
	Genorad 16	0.05 parts
	Rapi-cure DVE-3 (difunctional vinyl ether from ISP Europe)	10.0 parts
	Lucirin TPO (photoinitiator from BASF)	8.5 parts
	Benzophenone (photoinitiator)	4.0 parts
10	Irgacure 184 (photoinitiator from Ciba)	4.0 parts
	Byk 307 (defoamer from BYK Chemie)	0.05 parts

15 Sartomer 285 is tetrahydrofuryl acrylate, i.e. a monofunctional acrylate. The product was an ink having a viscosity of 5.8 mPas at 25°C. The ink was printed on to cardboard and exposed by passing at 30 m/min under light from an iron-doped ultraviolet lamp of power 120 W/cm. As in Example 1 the ink gave a print with good cure, adhesion and chemical resistance.

Claims

1. An ink-jet ink which is substantially free of water, volatile organic solvents and multifunctional (meth)acrylates, comprising at least one monofunctional (meth)acrylate monomer, at least one α,β -unsaturated ether monomer, at least one radical photoinitiator and at least one colouring agent, the ink having a viscosity of less than 50 mPas at 25°C.
2. An ink-jet as claimed in claim 1 which is suitable for printing onto porous substrates.
3. An ink-jet ink as claimed in claim 1 or 2, wherein the ink includes, by weight, from 2 to 15 parts of monofunctional (meth)acrylate monomer to 1 part of α,β -unsaturated ether monomer.
4. An ink-jet ink as claimed in any preceding claim, wherein the monofunctional (meth)acrylate monomer is selected from the esters of acrylic acid, for example octyl acrylate, decyl acrylate, isobornyl acrylate, phenoxyethyl acrylate, tetrahydrofuryl acrylate, 2-(2-ethoxyethoxy) ethylacrylate, and mixtures thereof.
5. An ink-jet ink as claimed in any preceding claim, wherein the monofunctional (meth)acrylate monomer is present in an amount from 50 to 95% by weight, preferably from 60 to 80% by weight.
6. An ink-jet ink as claimed in any preceding claim, wherein the α,β -unsaturated ether monomer is present from 1 to 30% by weight, preferably from 7 to 15%, provided that the ratio of (meth)acrylate monomer to α,β -unsaturated ether monomer is between 2:1 and 15:1.
7. An ink-jet ink as claimed in any one of the preceding claims, wherein the α,β -unsaturated ether monomer is a vinyl ether monomer.

8. An ink-jet ink as claimed in claim 7, wherein the vinyl ether is selected from triethylene glycol divinyl ether, diethylene glycol divinyl ether, 1,4-cyclohexanedimethanol divinyl ether, ethylene glycol monovinyl ether and mixtures thereof.

5

9. An ink-jet ink as claimed in any preceding claim, wherein the photoinitiator is a free radical photoinitiator, preferably selected from benzophenone, 1-hydroxycyclohexyl phenyl ketone, 2-benzyl-2-dimethylamino-(4-morpholinophenyl)butan-1-one, benzil dimethylketal, bis(2,6-dimethylbenzoyl)-2,4,4-trimethylpentylphosphine oxide or mixtures thereof.

10

10. An ink-jet ink as claimed in any preceding claim, wherein the photoinitiator is present from 1 to 20% by weight, preferably from 4 to 10% by weight, of the ink.

15

11. An ink-jet ink as claimed in any preceding claim, wherein the ink includes a dispersible pigment as a colouring agent.

12. An ink-jet ink as claimed in claim 11, wherein the dispersible pigment is present from 0.5 to 15% by weight, more preferably from 1 to 5% by weight, of the ink.

20

13. A method of ink-jet printing, wherein the method uses the ink-jet ink as claimed in any preceding claim.

25

14. A method as claimed in claim 13, wherein printing is carried out onto porous substrates.

CB
2R88

TO: International Unit Room GY 19
IU officer: Kelly Sheppard
COC TO SUPPORT PCT APPLICATION NO

PCT/AB2003/002954

THE PATENT OFFICE
15 SEP 2003
Received in Patents
International Unit

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

☐ **BLACK BORDERS**

☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**

☐ **FADED TEXT OR DRAWING**

☒ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**

☐ **SKEWED/SLANTED IMAGES**

☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**

☐ **GRAY SCALE DOCUMENTS**

☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**

☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**

☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.